


Cable Joiner

IPX8



- Features and Benefits**
- Temperature Range -25°C ~85°C
 - Flame UL94 V0
 - Cable Diameter Φ 6.5~ Φ 8.5mm
 - IPX8 rated for harsh environments

Part Number	Material Flame	Description
CNPL04BHC-S8001	4	Screw in Pin, Conductor Range 14~26AWG, Current Range Max 20A, Color Black
CNPL08DHC-S8001	8	Screw in Pin, Conductor Range 18~26AWG, Current Range Max 7A, Color Black



ODS Electronics

Quality Products · Innovative Solution




ODS Electronics

Quality Products · Innovative Solution

Cable Joiner

Assembly Instructions

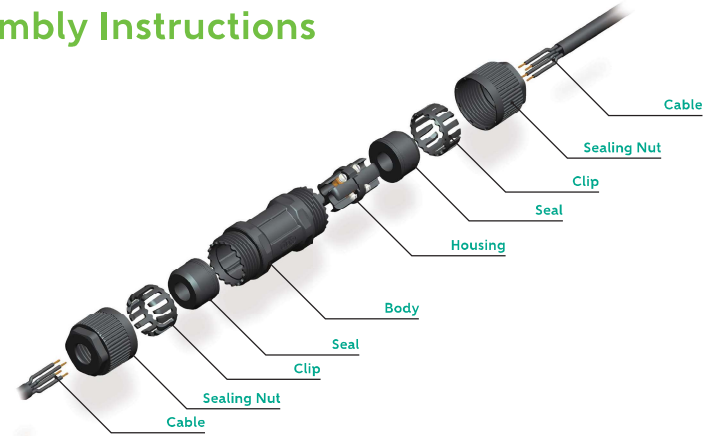

- Strip the cable sheath and insulation.
- Insert the cable through the sealing nut, clip, seal and body.
- Unscrew the screws.
- Insert each wire to the respective hole and tighten each screw.
- Insert each wire to the respective hole and tighten each screw.
- Insert the Housing to Body, pull the housing to center then rotate the body to let housing stop.
- Connect the seal and the clip respectively.
- Connect the sealing nut and tighten using hand tool (optional) or your hand while holding assy.