


## M12 Vent

Rear Fastened, IPX8

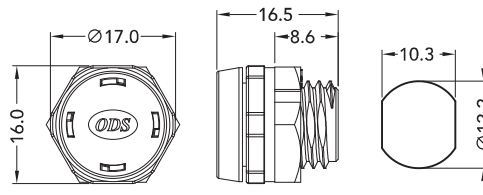


### Features and Benefits

- Temperature Range -40°C ~105°C
- Max.. Panel Thickness 4.0mm
- Air Permeability 79.3ml/min
- Water Entry Pressure 15MH2O
- Configurable & customizable
- IPX8 rated for harsh environments

Part Number	Description
VTP12S8001	Screw Thread, Plastic Color Black

## M12 Vent

Rear Fastened, IPX8

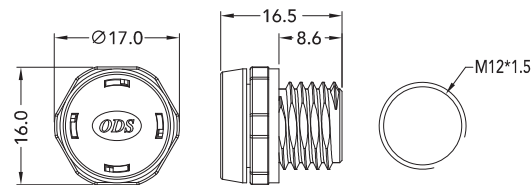

### Features and Benefits

- Temperature Range -40°C ~105°C
- Min. Panel Thickness 3.0mm
- Air Permeability 79.3ml/min
- Water Entry Pressure 15MH2O
- Configurable & customizable
- IPX8 rated for harsh environments

Part Number	Description
VTP12W8001	Screw Thread, Plastic Color Black, Without Screw Nut