


## M25 Waterproof Plug

IPX7

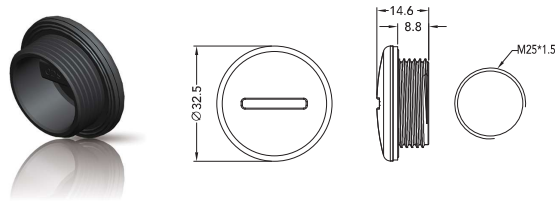


- Features and Benefits**
- Temperature Range -40°C ~105°C
  - Material UV Resistance Range II
  - Configurable & customizable

Part Number	Material Flame	Color	Panel Thickness	Description
CUMPLUGSN71	UL94 V2	Black	min. 3,0mm	Without Panel Nut (Screw M25xP1,5)
CUMPLUGSN7B	UL94 V0	Black	min. 3,0mm	Without Panel Nut (Screw M25xP1,5)
CUMPLUGSN74	UL94 V2	Gray	min. 3,0mm	Without Panel Nut (Screw M25xP1,5)

## M25 Waterproof Plug With Panel Nut

IPX7

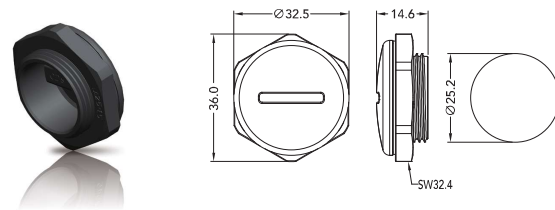


- Features and Benefits**
- Temperature Range -40~105°C
  - Material UV Resistance Range II
  - Configurable & customizable
  - With Panel Nut

Part Number	Material Flame	Color	Panel Thickness	Description
CUMPLUGSN75	UL94 V0	Black	Max. 3,0mm	With Panel Nut (Screw M25xP1,5)
CUMPLUGSN7C	UL94 V2	Black	Max. 3,0mm	With Panel Nut (Screw M25xP1,5)
CUMPLUGSN76	UL94 V2	Gray	Max. 3,0mm	With Panel Nut (Screw M25xP1,5)

## M20 Waterproof Plug

IPX7

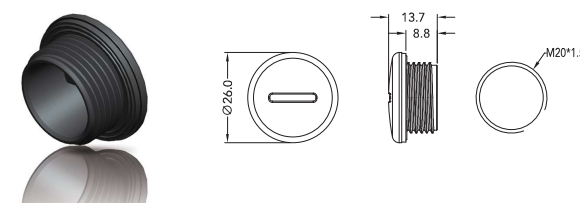


- Features and Benefits**
- Temperature Range -40°C ~105°C
  - Material UV Resistance Range II
  - Configurable & customizable

Part Number	Material Flame	Color	Panel Thickness	Description
CUMPLUGSN72	UL94 V2	Black	min. 3,0mm	Without Panel Nut (Screw M20xP1,5)
CUMPLUGSN7D	UL94 V0	Black	min. 3,0mm	Without Panel Nut (Screw M20xP1,5)
CUMPLUGSN77	UL94 V2	Gray	min. 3,0mm	Without Panel Nut (Screw M20xP1,5)

## M20 Waterproof Plug With Panel Nut

IPX7

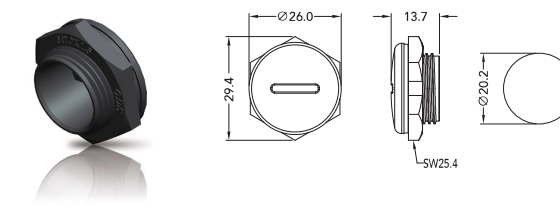


- Features and Benefits**
- Temperature Range -40°C ~105°C
  - Material UV Resistance Range II
  - Configurable & customizable
  - With Panel Nut

Part Number	Material Flame	Color	Panel Thickness	Description
CUMPLUGSN78	UL94 V0	Black	Max. 3,0mm	With Panel Nut (Screw M20xP1,5)
CUMPLUGSN7E	UL94 V2	Black	Max. 3,0mm	With Panel Nut (Screw M20xP1,5)
CUMPLUGSN79	UL94 V2	Gray	Max. 3,0mm	With Panel Nut (Screw M20xP1,5)

## 13/16" Waterproof Plug With Panel Nut

IPX7

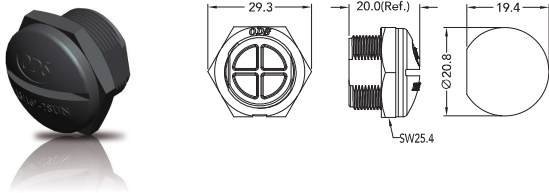


### Features and Benefits

- Temperature Range -40°C ~105°C
- Material UV Resistance Range II
- Configurable & customizable
- With Panel Nut

Part Number	Material Flame	Color	Panel Thickness	Description
CUCPLUGSN71	UL94 HB	Black	Max. 3.0mm	With Panel Nut (Screw 13/16"-28UN)
CUCPLUGSN75	UL94 V0	Black	Max. 3.0mm	With Panel Nut (Screw 13/16"-28UN)
CUCPLUGSN72	UL94 V2	Gray	Max. 3.0mm	With Panel Nut (Screw 13/16"-28UN)

## 13/16" Waterproof Plug

IPX7

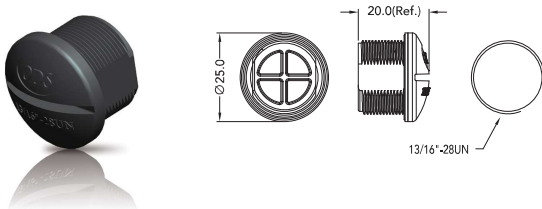

### Features and Benefits

- Temperature Range -40~105°C
- Material UV Resistance Range II
- Configurable & customizable

Part Number	Material Flame	Color	Panel Thickness	Description
CUCPLUGSN73	UL94 V0	Black	min. 3.0mm	Without Panel Nut (Screw 13/16"-28UN)
CUCPLUGSN76	UL94 HB	Black	min. 3.0mm	Without Panel Nut (Screw 13/16"-28UN)
CUCPLUGSN74	UL94 V2	Gray	min. 3.0mm	Without Panel Nut (Screw 13/16"-28UN)